

SU922 Digital Projector




Features

- High brightness 5000AL
- Big Zoom 1.6X
- Easy installation and control
- Vertical Lens Shift

Box Contents

- Remote Control w/ Battery
- Power Cord (by region)
- User Manual CD
- Quick Start Guide
- Warranty Card (by region)
- VGA(D-sub 15pin) Cable

Dimension

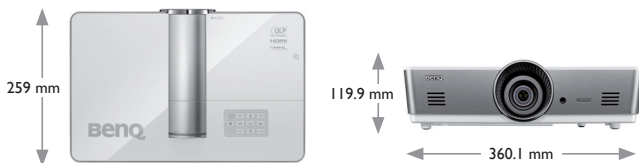


Optional Accessories

- Presentation Plus..... P/N: 65.J9306.002
- Spare Lamp Kit P/N: 5J.JDP05.001
- Ceiling Mount P/N: 5J.JAM10.001
- 3D Glasses..... P/N: 5J.J9H25.001



Because it matters

Input and Output Terminals

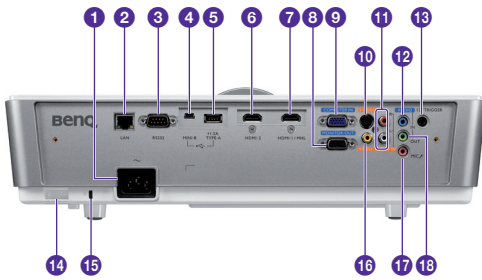

- | | | |
|---|--|--|
| <ul style="list-style-type: none"> ❶ AC Power cable inlet ❷ RJ45 LAN input jack ❸ RS-232 control port
Used to interface with a PC or home theater control/automation system. ❹ Mini B type USB port ❺ Type-A USB port (5V 1.5A Power) (For charging external device only) ❻ HDMI-2 port | <ul style="list-style-type: none"> ❼ HDMI-1/MHL port ❽ RGB signal output jack ❾ RGB (PC)/Component video (YPbPr/YCbCr) signal input jack ❿ S-Video input jack ⓫ RCA audio input jack ⓬ Audio input jack ⓭ 12VDC output terminal
Used to trigger external devices such as an | <ul style="list-style-type: none"> electric screen or light control, etc. Consult your dealer for how to connect these devices. ⓮ Security bar ⓯ Kensington lock slot ⓰ Video input jack ⓱ Microphone jack ⓲ Audio output jack |
|---|--|--|

Product Specifications

Projection System	DLP
Native Resolution	WUXGA (1920 x 1200)
Brightness	5,000AL
Contrast Ratio	3,000:1
Display Color	1.07 Billion Colors
Lens	F=2.45~3.07, f=15.78 ~ 25.12
Aspect Ratio	Native 16:10 (5 aspect ratio selectable)
Throw Ratio	1.07~1.71
Image Size (Diagonal)	60"~240"
Zoom Ratio	1.6X
Lamp Type	370W
Lamp Mode (Normal/Eco/SmartEco/LampSave)*	2000/2500 hours
Keystone Adjustment	2D, Vertical & Horizontal ± 30 degrees
Projection Offset	102.5% ±2.5%
Lens Shift	Vertical: +2.5%
Resolution Support	VGA(640 x 480) to UXGA(1600 x 1200)
Horizontal Frequency	15K~102KHz
Vertical Scan Rate	24~120Hz
Compatibility	HDTV Compatibility 480i, 480p, 576i, 576p, 720p, 1080i, 1080p Video Compatibility NTSC, PAL, SECAM
Interface	Computer in (D-sub 15pin) x 1 (Share with component) Monitor out (D-sub 15pin) x 1 Composite Video in (RCA) x 1 S-Video in (Mini DIN 4pin) x 1 HDMI x 2 (one with MHL) Audio in (Mini Jack) x 1 Audio L/R in (RCA) x 1 Audio out (Mini Jack) x 1 Speaker 10W x 2 LAN (RJ45) x 1 (LAN control) USB (Type A) x 1 (5V/1.5A Power Supply) USB (Type MINI-B) x 1 (Download) RS232 (DB-9pin) x 1 DC 12V Trigger x 1 IR Receiver x 2
Dimensions	Dimensions(W x H x D) 411.4x118.4x267.5 mm Weight 4.9KG
Power	Power Supply AC100 to 240V, 50 to 60 Hz Power Consumption Typical 490W, Network standby <6W, Standby power <0.5W Power Management Function Automatic power off after 20 minutes without a display source.
Audible Noise	36/33 dBA (Normal/Economic mode)
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)
Picture Modes	Bright/Presentation/sRGB/Cinema/(3D)/User 1/User 2

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.
** Default mode is Presentation. When 3D is on, Picture Modes only shows 3D. When 3D is off, it is not shown in Picture Modes.

Logistics information

Product Code	9H.JDS77.15E
EAN Code	471 8755 05802 8
Dimensions Single Carton (cm)	60*40*23
Carton Weight (kg)	6,9
Pallet Qty	40



BenQ Europe B.V.
Meerenakkerweg 1-17
5652 AR Eindhoven
The Netherlands
Tel: +31 88 8889200
Fax: +31 88 8889299

© 2016 BenQ Corp. Specification may vary by region, please visit your local stores for details. Actual product's features and specifications are subject to change without notice. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively. Doc.: PRJ HB BR EN 0301



Because it matters